AMENDMENT OF SOLICITATION	N/MODIFICATION (OF CONTRACT	1. CONTRACT ID C	ODE	PAGE OF PAGES
2. AMENDMENT/MODIFICATION NO.	3. EFFECTIVE DATE	4. REQUISITION/PURCHA	SE REQ. NO.	5. PROJECT	NO. (If applicable)
6. ISSUED BY CODE		7. ADMINISTERED BY (If	other than Item 6)	CODE	
8. NAME AND ADDRESS OF CONTRACTOR (No., street	et, county, State and ZIP Code	e) <u>(</u>	9A. AMENDME		ATION NO.
			10A. MODIFICATION TO THE TOTAL TO THE T		ITRACT/ORDER NO.
CODE	ACILITY CODE				
11. THIS IT	EM ONLY APPLIES TO	AMENDMENTS OF SC	DLICITATIONS		
The above numbered solicitation is amended as set of Offers must acknowledge receipt of this amendment price (a)By completing items 8 and 15, and returning or (c) By separate letter or telegram which includes a ref THE PLACE DESIGNATED FOR THE RECEIPT OF OFFER amendment your desire to change an offer already subm solicitation and this amendment, and is received prior to	or to the hour and date specific copies of the amendment; (erence to the solicitation and a RS PRIOR TO THE HOUR AND itted, such change may be ma	ed in the solicitation or as ame (b) By acknowledging receipt of amendment numbers. FAILUF D DATE SPECIFIED MAY RES ade by telegram or letter, prov	ended, by one of the of this amendment of the OF YOUR ACKNOULT IN REJECTION (n each copy of WLEDGMENT ⁻ OF YOUR OFFE	the offer submitted; TO BE RECEIVED AT ER. If by virtue of this
12. ACCOUNTING AND APPROPRIATION DATA (If req					
	ONLY APPLIES TO MO S THE CONTRACT/ORI			S.	
CHECK ONE A. THIS CHANGE ORDER IS ISSUED P NO. IN ITEM 10A.	JRSUANT TO: (Specify autho	ority) THE CHANGES SET FOR	rth in Item 14 Are	E MADE IN THE	CONTRACT ORDER
B. THE ABOVE NUMBERED CONTRAL appropriation date, etc.) SET FORT	H IN ITEM 14, PURSUANT TO	O THE AUTHORITY OF FAR 4		as changes in p	paying office,
C. THIS SUPPLEMENTAL AGREEMENT	IS ENTERED INTO PURSUAN	IT TO AUTHORITY OF:			
D. OTHER (Specify type of modification	and authority)				
E. IMPORTANT: Contractor is not,	is requiredto sign thi	is documentand returr	n co	opiesto the	issuingoffice.
14. DESCRIPTION OF AMENDMENT/MODIFICATION (
Except as provided herein, all terms and conditions of the 15A. NAME AND TITLE OF SIGNER (Type or print)	e aocument referencea in Item	16A. NAME AND TITLE OF			
15B. CONTRACTOR/OFFEROR	15C. DATE SIGNED	16B. UNITED STATES OF A	MERICA		16C. DATE SIGNED
(Signature of person authorized to sign)		(Signature of	nature of Contracting Officer)		-

Item 14. Continued.

CHANGES TO BID OPENING DATE

1. <u>Standard Form 1442, First Page, Item No. 13.A</u>.- In the second line, change the bid opening date from "8 August, 2000" to "11 August, 2000".

CHANGES TO THE SPECIFICATIONS

2. <u>Replacement Section</u> - Replace the following section with the accompanying new section of the same number and title, bearing the notation "ACCOMPANYING AMENDMENT NO. 0001 TO SOLICITATION NO. DACW63-00-B-0027:"

02845 SPECIFICATION FOR INSTALLATION OF TREATED TIMBER DELINEATORS


END OF AMENDMENT

SECTION 02845 - SPECIFICATION FOR INSTALLATION OF TREATED TIMBER DELINEATORS


- a. Furnish all tools, labor, equipment and materials to construct horizontal timber delineator barriers from one (1) to five (5) tiers in height, at various locations in accordance with the attached drawing and following specifications. [AM#1] Timber delineators shall be 6" x 6" in cross-section.
- b. Delineators shall be constructed to designate and outline parking areas, picnic sites, walking trails, camping sites, and any other area the Contracting Officer's Representative may specify. The Government will provide sufficient staking to designate the proposed site limits, and shall advise the Contractor as to the number of tiers desired at each site.
- c. The Contractor shall clear the proposed delineator alignment of rocks, brush, and debris prior to laying the timbers, and do all necessary site leveling before constructing the barriers.
- d. The timbers shall be placed end to end, in line, with staggered end joints when more than one (1) tier high.
- e. The bottom tier, shall be drilled and anchored at each butt joint using rebar. The second (2nd) through fifth (5th) tiers shall be attached to the lower adjacent tier by drilling a pilot hole through the tiers and then nailing the timbers together using ten-inch to twelve-inch (10"-12") long, three-eighths-inch (3/8") diameter, bridge nails. The pilot holes shall be small enough diameter to hold the bridge nails snugly and require that the nails be driven through the pilot holes into the underlying layer.
- f. It shall also be necessary at times for the Contractor to cut the timbers into shorter section or pieces. Timbers less than four feet (4') in length shall not be used. These cuts may be square cut or beveled, depending upon the C.O.R.'s instructions per installation. Regardless of timber length, each tier shall still be installed as set out in above paragraphs.
- g. The Contractor shall exercise care in constructing barriers to insure damage to trees and vegetation will is essential to obtaining necessary alignment and grade. The Contractor shall restore work area to near original condition and shall clean up and remove all debris resulting from his activities.
- h. Payment will be by the linear foot of timber installed.

- i. Work shall be periodically inspected by the Contracting Officer's Representative, who shall advise the Contractor of any deficiency found. The Contractor will take immediate action to correct said deficiency and to insure that the problem does not recur.
- j. No payment shall be made until the job has been inspected and approved by the Contracting Officer's Authorized Representative.

ļ

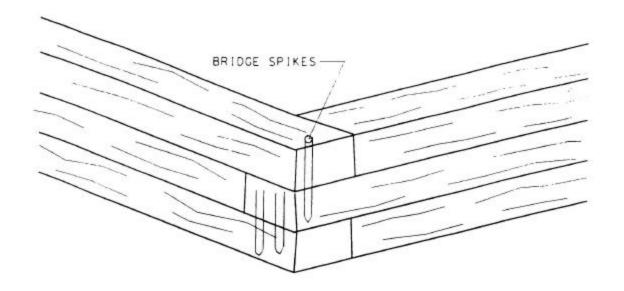

TREATED TIMBER BARRIER (End View)

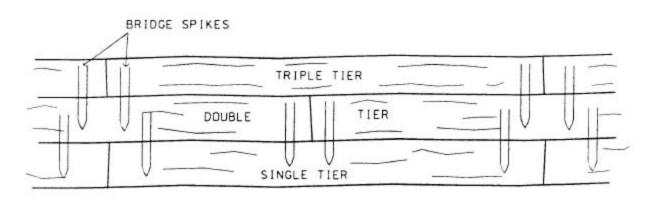

TREATED TIMBER BARRIER
(Side View)

TYPICAL TREATED TIMBER BARRIER ASSEMBLY (1 TO 5 LEVELS) N.T.S.